



ZetaLube


A New Lubricity Dimension
Evolved From Experience



ZetaLube 860 Automatic Transmission Fluid

Description

ZetaLube 860 Automatic Transmission Fluid is formulated with quality refined base fluid and proprietary package of additives to provide long-life service to automatic transmission systems of vehicles such as passenger cars, light trucks etc. Satisfying specific automotive manufacturers' specification and performance requirements, it effectively protects transmissions from oxidation and corrosion and subsequently extends equipment life with negligible maintenance.

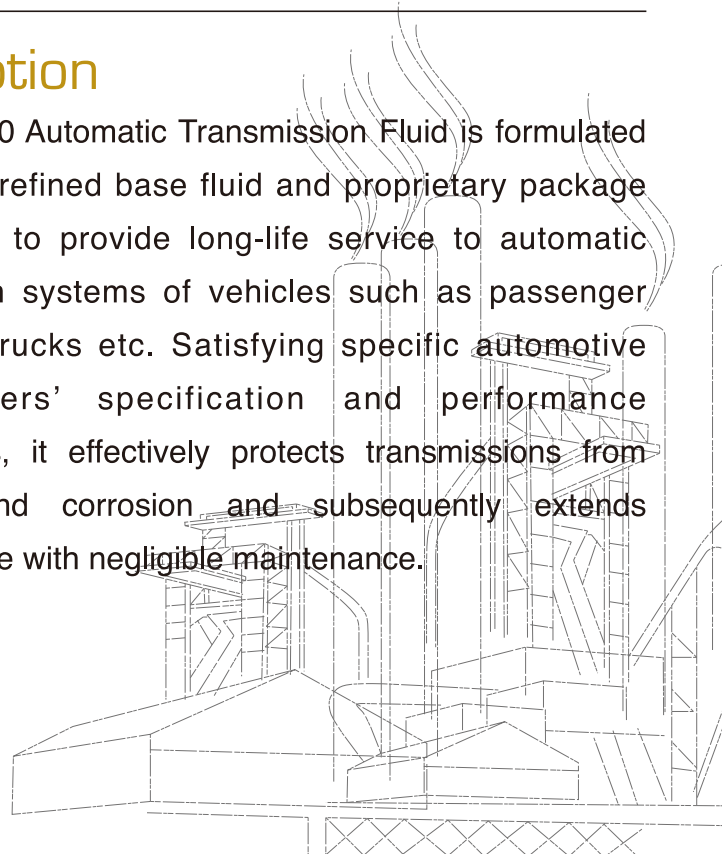

www.magnagroup.com


ITW PPFK reserves the right to modify or change this product for purpose of improving its performance characteristics ©2016 ITW PP & F Korea Limited.

The ZetaLube Trade Mark is the property of ITW Inc., and is used under licence by ITW PP & F Korea Limited



Features and Benefits

- Excellent anti-wear properties, oxidation stability and corrosion protection to protect transmissions designed for long usage time.
- Low frictional coefficient with improved hydrolytic stability to ensure outstanding pumpability and fluidity to gear shifting mechanism for automatic transmission.
- Wide service temperature range to provide year-round protection to transmissions.
- Meets the stringent performance requirements and specifications of most automotive manufacturers.



Recommended Applications

- For all passenger cars and light trucks requiring DEXRON-III or earlier specifications: GM, FORD, ...
- Can also be used in trucks, buses, industrial equipment such as mobile hydraulic equipment & machinery, off-highway construction, earthmoving & mining equipment and agriculture equipment.
- Always check the owner's manual for manufacturers' maintenance requirements and recommendations such as ATF specifications, recommended oil-change interval/mileage, etc.

Typical Data

| TEST | ASTM TEST METHOD | TEST RESULT |
|--|------------------|-------------|
| Appearance | Visual | Red |
| Density, kg/L @ 15°C | D-1298 | 0.870 |
| Viscosity, cSt @ 40°C | D-445 | 34 |
| Viscosity, cSt @ 100°C | D-445 | 7.6 |
| Viscosity Index | D-2270 | 206 |
| Flash Point, COC, °C | D-92 | 165 |
| Pour Point °C | D-97 | -48 |
| Copper Strip Corrosion 3 hours @ 150°C | D-130 | 1b |

The data shown is typical value and may vary.

Pack-size

1 Litre Plastic Container

Authorized Distributor